


Material: Nylon PA Poliamida
Sello Hermético: NBR
Grado de Protección: IP68 (Con el Sello)
Temperatura de Trabajo: -40°C a 100°C
Color: Gris RAL7035

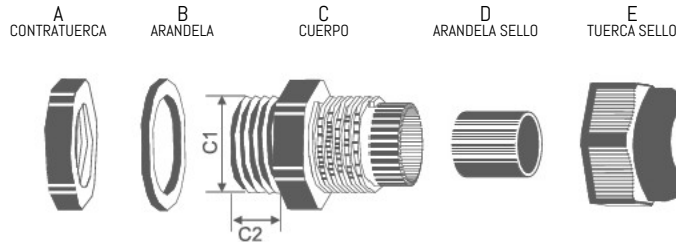

Prensa Cables							
Código MAZ	Código TM	Rosca	Diámetro de Cable (mm)	C1 (mm)	C2 (mm)	H (mm)	Llave
04-48-000	TM-PG7-P	PG7	3-6.5	12,5	8	22	16
04-48-001	TM-PG9-P	PG9	4-8	15,2	8	26	19
04-48-002	TM-PG11-P	PG11	5-10	18,6	8	27	22
04-48-003	TM-PG13,5-P	PG13,5	6-12	20,4	9	28	24
04-48-004	TM-PG16-P	PG16	8-14	22,5	10	30	27
N/D	TM-PG19-P	PG19	12-15	24	10	30	33
04-48-007	TM-PG21-P	PG21	13-18	28,3	10	35	33
N/D	TM-PG25-P	PG25	14-21	30	11	34	36
04-48-005	TM-PG29-P	PG29	18-25	37	15	40	42
04-48-006	TM-PG36-P	PG36	22-32	47	18	48	51
04-48-023	TM-PG48-P	PG48	37-44	59,3	18	50	64
N/D	TM-PG63-P	PG63	42-52	70	28	60	75
N/D	TM-PG13,5L-P	PG13,5L	6-12	20,4	15	28	24
N/D	TM-PG16L-P	PG16L	8-14	22,5	15	30	27
N/D	TM-PG19L-P	PG19L	12-15	24	15	30	33
N/D	TM-BSP1/4-P	BSP1/4	3-6.5	13	8	22	16
N/D	TM-BSP3/8-P	BSP3/8	5-10	16,5	9	26	22
N/D	TM-BSP1/2-P	BSP1/2	6-12	20,9	9	30	24
N/D	TM-BSP3/4-P	BSP3/4	13-18	26,4	11	37	33
N/D	TM-BSP1-P	BSP1	18-25	33	12	40	42
N/D	TM-BSP1-1/4-P	BSP1-1/4	25-32	41,9	15	40	52
N/D	TM-BSP1-1/2-P	BSP1-1/2	32-38	47,5	15	48	60
N/D	TM-BSP2-P	BSP2	37-44	59,6	15	50	68