Model P270/271/272 27mm Rotary Potentiometer Long Life - 1 Million cycles Conductive Plastic Element Heavy Duty Applications Sealed Unit Available RoHS Compliant



MODEL STYLES			
Panel, Solder Lugs, Single Gang	P270		
Panel, Solder Lugs, with Center Tap	P271		
Panel, Solder Lugs, Dual Gang	P272		
ELECTRICAL <sup>1</sup>			
Resistance Range, Ohms 200-1M 1K-1M (for			
Standard Resistance Tolerance	± 10%		
Residual Resistance	6 Ώ max.		
Input Voltage, maximum	500 Vdc not to exceed power rating		
Power rating, Watts	2 Watts @ 70°C for "B" Taper, 1 Watt for all others		
Dielectric Strength	1000VAC, I minute		
Insulation Resistance, Minimum	50M ohms at 500Vdc		
Sliding Noise	100mV max.		
Actual Electrical Travel, Nominal	300°		
Electrical Continuity, Nominal	312°		
MECHANICAL			

Total Mechanical Travel	312°± 5°
Static Stop Strength, Maximum	200 oz-in
Rotational Torque, (Single gang)	Dust Proof : 1.0.oz-in. Max. Sealed : 1.0 to 2.5 oz-in
Rotational Torque, Maximum (Dual gang)	Dust Proof : 3.0.oz-in. Sealed : 5.0 oz-in
Panel Nut Tightening Torque	25 lb-in


### ENVIRONMENTAL

Operating Temperature Range	-55°C to +120°C
Rotational Load Life	1M Cycles (10% $\Delta R$ )


<sup>1</sup> Specifications subject to change without notice.

## Model P270/271/272

### **ORDERING INFORMATION<sup>2</sup>**

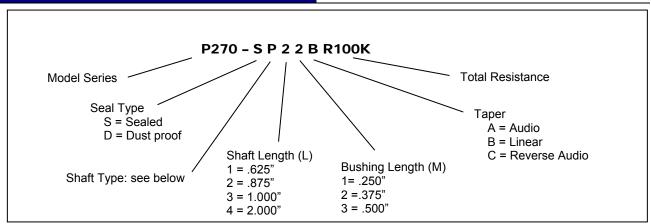

#### Shaft Types

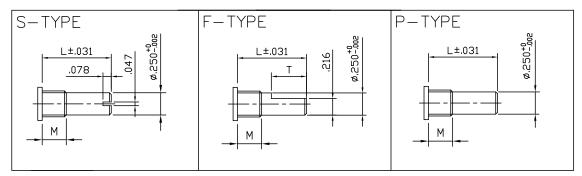


F-TYPE Sh	aft – Bushing Cor	h (M) Flat Length (T)			
Shaft Length (L)	Bushing Length (M)	Flat Length (T)			
(1) = .625	(1) = .250	.315			
(1) = .625	(2) = .375	.180			
(1) = .625	(3) = .500	Not Available			
(2) = .875	(3) = .500	.315			
All Other	Combinations	.375			

STANDARD RESISTANCE VALUES, OHMS										
1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG	

<sup>2</sup> Contact our customer service for custom designs and features.


# Model P270/271/272

## **CIRCUIT DIAGRAM**

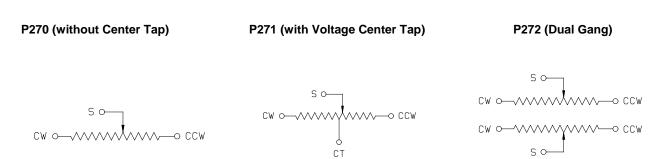

### **OUTLINE DRAWING**

#### Model 270

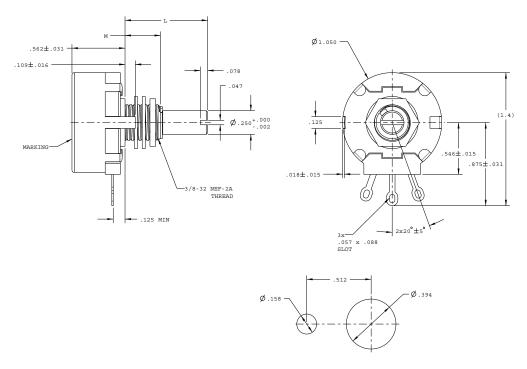

PANEL LAYOUT

Model P270/271/272

Model 271 (Center Tap)

